




# FLD SERIES





FLD-S

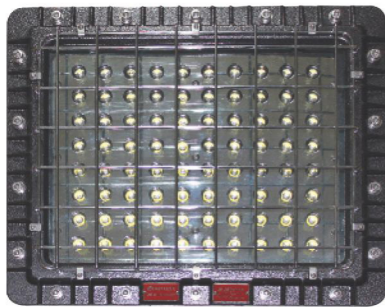



FLD-M

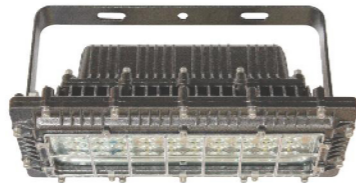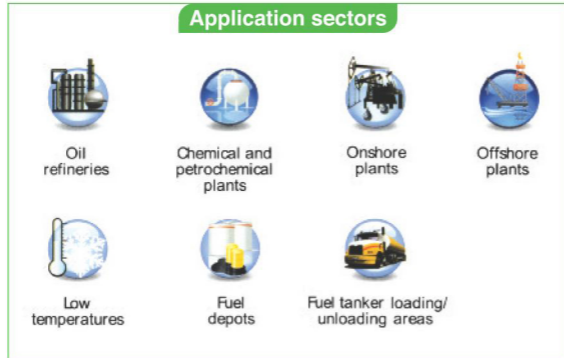

## Dimension I



FLD-S

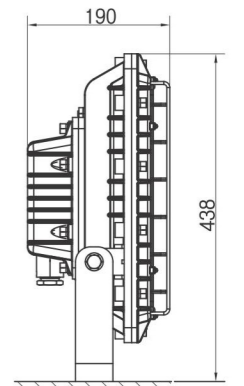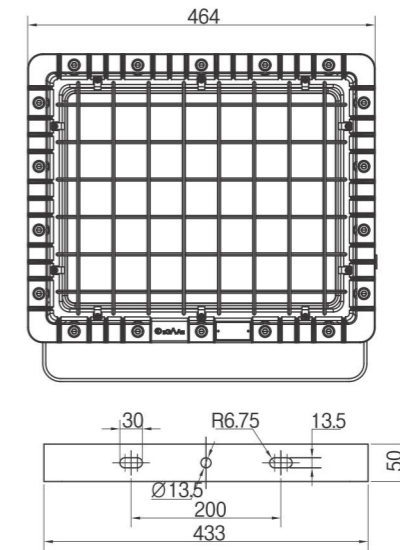

FLD-M

## Technical Data

구 분		SEBP-FLD-S-40	SEBP-FLD-S-50	SEBP-FLD-S-60	SEBP-FLD-M-80	SEBP-FLD-M-120	SEBP-FLD-M-160
전기 사양	소비전력 (W)	40W	50W	60W	80W	120W	160W
	정격전압 (V)	220V	220V	220V	220V	220V	220V
	역률 (%)	95이상	95이상	95이상	95이상	95이상	95이상
	전원효율 (%)	85이상	85이상	85이상	85이상	85이상	85이상
광 사양	전광속 (lm)	4,000	5,000	6,000	8,000	12,000	16,000
	연색성 (CRI)	75이상					
	광효율 (lm/W)	100이상					
	색온도 (K)	5700K~6500K					
수명 (시간)	30,000이상						
사용주위온도(°C)	-20°C ~ +40°C						
용량 · 등급	Ex d IIB+H <sub>2</sub> T6 IP65 / Ex tD A21 IP65 T85°C						

## Description

- Body : Die-casting aluminium
- Smps Box : Die-casting aluminium
- Globe : Tempered glass
- Gasket : Silicone gasket
- Bolts and screws : Stainless steel
- Coating : Epoxy coating
- Entries : PF3/4" threads

## Compliance

Notification of Ministry of Labor No.2013-54

## Photometric Data

