


Flame-Proof Fitting Accessories

# EXTRA SERIES

Type of Explosion-Proof  
Flameproof (Ex d IIC)

Adapter

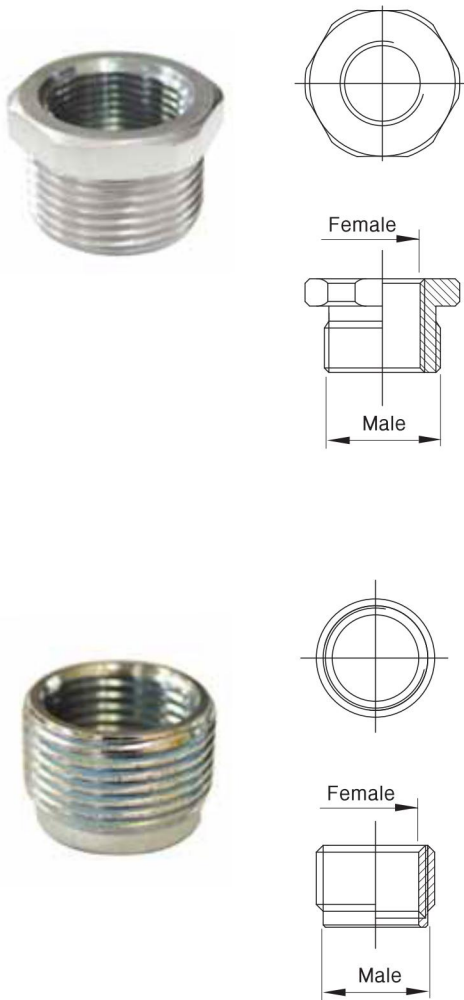

Ordering No.	Male Thread Size	Female Thread Size
EXRA-2216	3/4" (22C)	1/2" (16C)
EXRA-2816	1" (28C)	1/2" (16C)
EXRA-2822	1" (28C)	3/4" (22C)
EXRA-3616	1 1/4"(36C)	1/2" (16C)
EXRA-3622	1 1/4"(36C)	3/4" (22C)
EXRA-3628	1 1/4"(36C)	1" (28C)
EXRA-4216	1 1/2"(42C)	1/2" (16C)
EXRA-4222	1 1/2"(42C)	3/4" (22C)
EXRA-4228	1 1/2"(42C)	1" (28C)
EXRA-4236	1 1/2"(42C)	1 1/4" (36C)
EXRA-5416	2"(54C)	1/2" (16C)
EXRA-5422	2"(54C)	3/4" (22C)
EXRA-5428	2"(54C)	1" (28C)
EXRA-5436	2"(54C)	1 1/4" (36C)
EXRA-5442	2"(54C)	1 1/2" (42C)
EXRA-7028	2 1/2"(70C)	1" (28C)
EXRA-7036	2 1/2"(70C)	1 1/4" (36C)
EXRA-7042	2 1/2"(70C)	1 1/2" (42C)
EXRA-7054	2 1/2"(70C)	2" (54C)
EXRA-8228	3"(82C)	1" (28C)
EXRA-8236	3"(82C)	1 1/4" (36C)
EXRA-8242	3"(82C)	1 1/2" (42C)
EXRA-8254	3"(82C)	2" (54C)
EXRA-8270	3"(82C)	2 1/2" (70C)
EXRA-0454	4"(104C)	2" (54C)
EXRA-0470	4"(104C)	2 1/2" (70C)
EXRA-0482	4"(104C)	3" (82C)

**Standard Materials**

- Carbon Steel

**Standard Finish**

- Zinc Electroplating

**Compliance & Certification**

- Notification of Ministry of Labor No. 2010-36
- Certified by KOSHA  
(Korea Occupational Safety & Health Agency)