


Fluorescent Lighting Fixtures

FLRM SERIES

Degree of Protection : **Weather Proof-IP66**

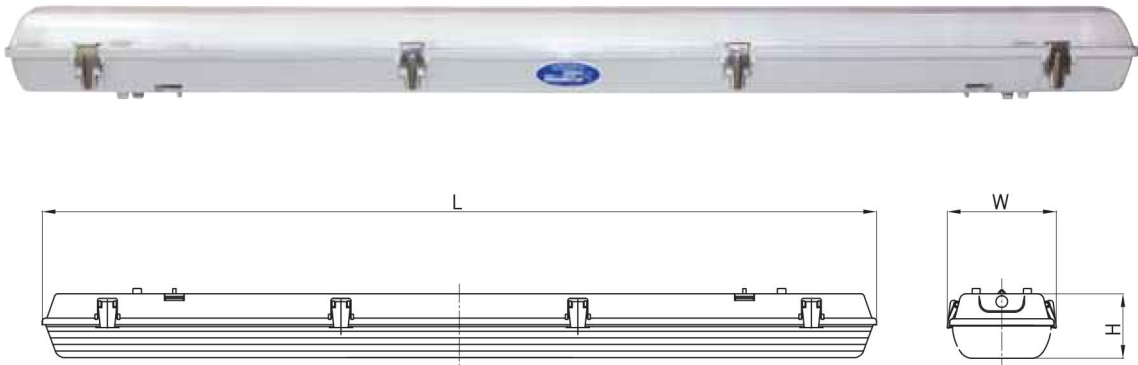

Application

FLRM Series Fluorescent Lighting fixtures are used

- In installations where moisture, dirt, dust, vibration, corrosion and rough usage are problems.
- Indoors or outdoors in industrial locations where enclosed and weather proof fixtures are required.
- Lighting walkways, loading docks or stairways.

Features

- Simple construction of enclosures.
- Safety operation and ease of maintenance.
- With the electronic ballast or Inductive ballast to be high power factor, and integral emergency light.

Standard Materials

- Enclosure : Polycarbonate
- Inner Reflector : High purity aluminium
- Cover : Polycarbonate

Standard Finish

- MUNSSELL No. White N-9.3
- If you want another color, contact us please.

Dimension

Catalog No.	Watt	L(mm)	W(mm)	H(mm)
SEBP-FLRM281	28Wx1	1203	104	80
SEBP-FLRM282	28Wx2	1203	165	80
SEBP-FLRM321	32Wx1	1268	104	100
SEBP-FLRM322	32Wx2	1268	165	100
SEBP-FLRM361	36Wx1	1268	104	100
SEBP-FLRM362	36Wx2	1268	165	100

Technical Data

Electrical Ratings	
Rated Voltage	AC110V/220V/240V (*See Below)
Rated Wattage	32W*1 / 32W*2 / 36W*1 / 36W*2
Rated Frequency	50Hz/60Hz
Entry Size	1/2", 3/4"

Ordering Number

LAMP	Watt	Catalog No.	Weigh
Fluorescent Lamp	28W X 1	SEBP-FLRM281	1.7kg
	28W X 2	SEBP-FLRM282	2.0kg
	32W X 1	SEBP-FLRM321	1.8kg
	32W X 2	SEBP-FLRM322	2.3kg
	36W X 1	SEBP-FLRM321	2.1kg
	36W X 2	SEBP-FLRM322	2.5kg


Ordering Information

SEBP - FLRM - 32 - 1



* Entry Size : 1/2" / 3/4"

Photometric Data

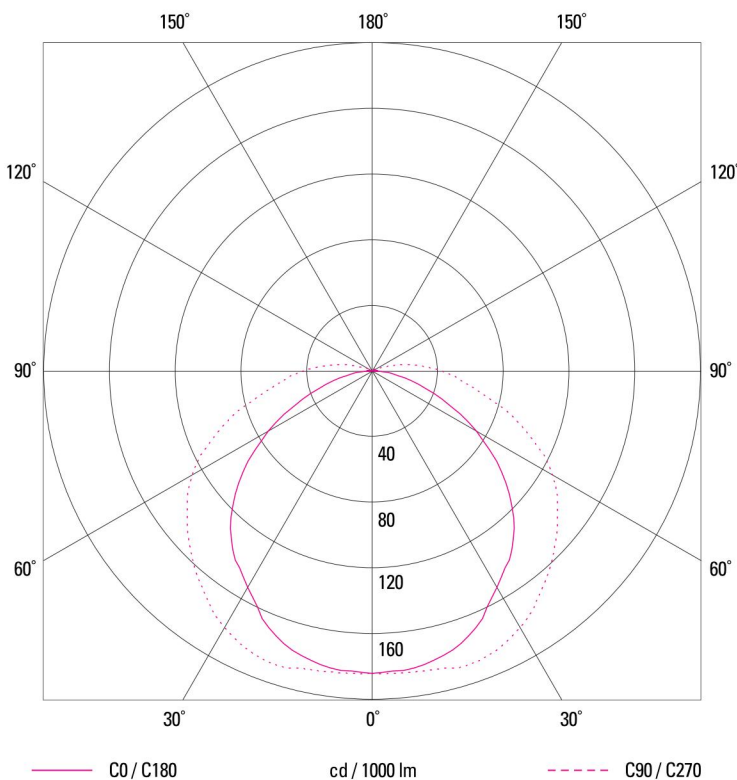

	C0	C90	C180
0°	184	184	184
10°	181	185	181
20°	172	188	172
30°	152	180	152
40°	134	165	134
50°	106	147	106
60°	73	127	73
70°	40	96	40
80°	16	64	16
90°	3	43	3
100°	3	23	3
110°	2	8	2
120°	1	4	1
130°	1	2	1
140°	1	1	1
150°	1	0	1
160°	1	0	1
170°	0	0	0
180°	0	0	0
	cd / 1000 lm		