


Flame-Proof Union Coupling

UCX SERIES


Type of Explosion-Proof
Flameproof (Ex d IIC)

UCX

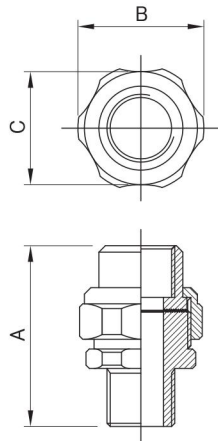

Catalog No.	Thread Size	Dimensions		
		A	B	C
SEBP-UCX-16	16C (1/2")	35	38	55
SEBP-UCX-22	22C (3/4")	41	44	58
SEBP-UCX-28	28C (1")	50	53	67
SEBP-UCX-36	36C (1-1/4")	61	64	76
SEBP-UCX-42	42C (1-1/2")	67	70	83
SEBP-UCX-54	54C (2")	78	82	88
SEBP-UCX-70	70C (2-1/2")	97	101	105
SEBP-UCX-82	82C (3")	110	114	116
SEBP-UCX-104	104C (4")	134	139	135

UCX-M

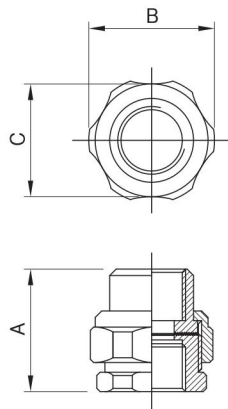

Catalog No.	Thread Size	Dimensions		
		A	B	C
SEBP-UCX-M-16	16C (1/2")	26	38	38
SEBP-UCX-M-22	22C (3/4")	31	44	41
SEBP-UCX-M-28	28C (1")	38	53	47
SEBP-UCX-M-36	36C (1-1/4")	48	64	53
SEBP-UCX-M-42	42C (1-1/2")	54	70	60
SEBP-UCX-M-54	54C (2")	70	82	63
SEBP-UCX-M-70	70C (2-1/2")	82	101	74
SEBP-UCX-M-82	82C (3")	95	114	82
SEBP-UCX-M-104	104C (4")	121	139	105

Standard Materials

- Body : Carbon Steel

Standard Finish

- Zinc electro plated

Compliance & Certification

- Notification of Ministry of Labor No. 2010-36
- Certified by KOSHA
(Korea Occupational Safety & Health Agency)