


Flame-Proof Fitting Accessories

EXSC SERIES

Type of Explosion-Proof
Flameproof (Ex d IIC)

Socket

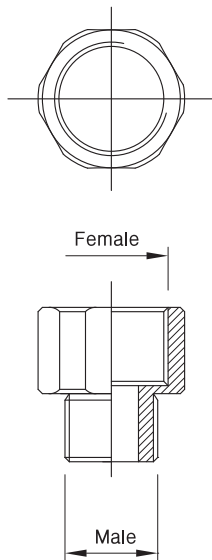

Ordering No.	Male Thread Size	Female Thread Size
EXSC-1622	1/2" (16C)	3/4" (22C)
EXSC-1628	1/2" (16C)	1" (28C)
EXSC-2228	3/4" (22C)	1" (28C)
EXSC-1636	1/2" (16C)	1 1/4"(36C)
EXSC-2236	3/4" (22C)	1 1/4"(36C)
EXSC-2836	1" (28C)	1 1/4"(36C)
EXSC-1642	1/2" (16C)	1 1/2"(42C)
EXSC-2242	3/4" (22C)	1 1/2"(42C)
EXSC-2842	1" (28C)	1 1/2"(42C)
EXSC-3642	1 1/4" (36C)	1 1/2"(42C)
EXSC-1654	1/2" (16C)	2"(54C)
EXSC-2254	3/4" (22C)	2"(54C)
EXSC-2854	1" (28C)	2"(54C)
EXSC-3654	1 1/4" (36C)	2"(54C)
EXSC-2254	1 1/2" (42C)	2"(54C)
EXSC-2870	1" (28C)	2 1/2"(70C)
EXSC-3670	1 1/4" (36C)	2 1/2"(70C)
EXSC-4270	1 1/2" (42C)	2 1/2"(70C)
EXSC-5470	2" (54C)	2 1/2"(70C)
EXSC-2882	1" (28C)	3"(82C)
EXSC-3682	1 1/4" (36C)	3"(82C)
EXSC-4282	1 1/2" (42C)	3"(82C)
EXSC-5482	2" (54C)	3"(82C)
EXSC-7082	2 1/2" (70C)	3"(82C)
EXSC-5404	2" (54C)	4"(104C)
EXSC-7004	2 1/2" (70C)	4"(104C)
EXSC-8204	3" (82C)	4"(104C)

Standard Materials

- Carbon Steel

Standard Finish

- Zinc Electroplated

Compliance & Certification

- Notification of Ministry of Labor No. 2010-36
- Certified by KOSHA
(Korea Occupational Safety & Health Agency)