


HFL SERIES




< TOP VIEW >




< L-SIDE VIEW >

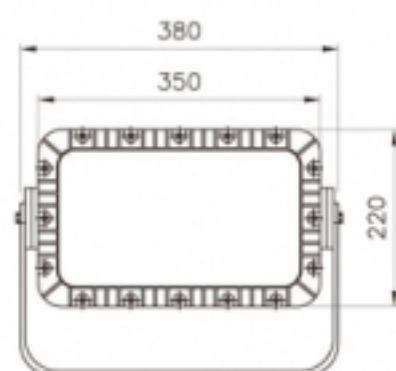

< FRONT VIEW >

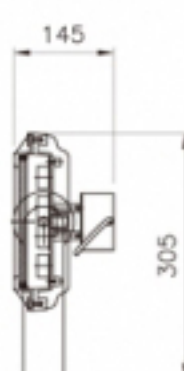

< R-SIDE VIEW >

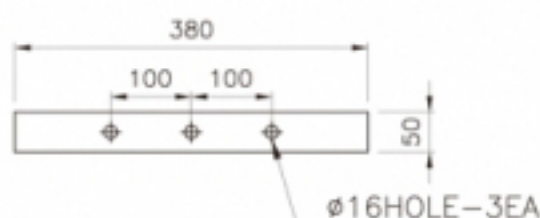

< BRACKET HOLE DETAIL >

- Body : Die-casting aluminium
- Cover : Die-casting aluminium
- Cover glass : Tempered glass
- Bracket : Steel
- Bolt & Washer : Stainless steel
- Coating : Epoxy coating

- KSC 7712

Model No.		SEBP-HFL							
		80	90	100	120	150	200	250	300
Electrical Ratings	Rated Wattage	80W	90W	100W	120W	150W	200W	250W	300W
	Input Voltage	90 ~ 264VAC, 50/60Hz							
	Power Factor	≥0.95							
	Surge Protection	5kV (Line to F.G)							
Luminous Ratings	Luminous Flux	8,800lm	99,000lm	11,000lm	13,200lm	16,500lm	22,000lm	27,500lm	33,300lm
	CRI	Minium. 80							
	Luminous Efficiency	Minium. 110lm/W							
	Color Temperature	5,700K ~ 6,500K (3,000K optional)							
Warranty		Five-year limited warranty Minimum. 50,000 hours lifetime							
Ambient temperature		-20°C ~ +40°C							
Type of Protection		IP65							
Applicable Zone		Factories, Warehouses, Exhibition Hall , stadiums, etc.							
Installation		Ceiling / Bracket Type							