
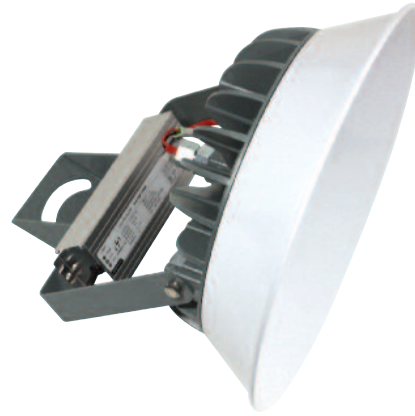


## Weather Proof Type LED Lighting Fixtures


# WPL SERIES

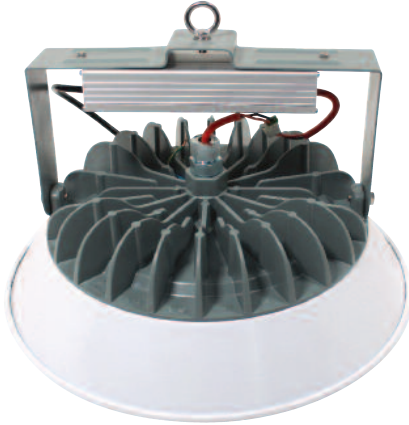

## Technical Data

Model No.		SEBP-WPL							
		80	90	100	110	120	130	140	150
Electrical Ratings	Rated Wattage	80W	90W	100W	110W	120W	130W	140W	150W
	Input Voltage	90 ~ 264VAC, 50/60Hz							
	Power Factor	≥0.95							
	Surge Protection	5kV (Line to F.G)							
Luminous Ratings	Luminous Flux	8,800lm	99,000lm	11,000lm	12,100lm	14,400lm	14,300lm	15,400lm	16,500lm
	CRI	Minium. 80							
	Luminous Efficiency	Minium. 110lm/W							
	Color Temperature	5,700K ~ 6,500K (3,000K optional)							
Warranty		Five-year limited warranty Minimum. 50,000 hours lifetime							
Ambient temperature		-20°C ~ +40°C							
Type of Protection		IP65							
Applicable Zone		Factories, Warehouses, Exhibition Hall , stadiums, etc.							
Installation		Ceiling / Pendant / 40° Bracket / 90° Bracket / U-Pole / Stanchion Pole Type							

## Bottom View Photo

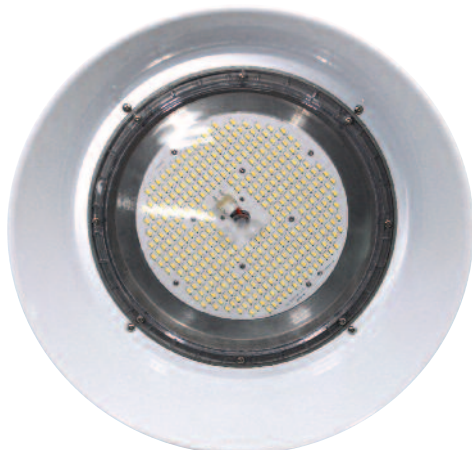

## Description

- Body : Die-casting aluminium
- Cover : Polycarbonate
- Reflector : aluminium sheet
- Bracket : Steel
- Bolt & Washer : Stainless steel
- Coating : Epoxy coating

## Compliance

- KSC 7712