



High Pressure Mercury Lamps & Ballasts



Dimension

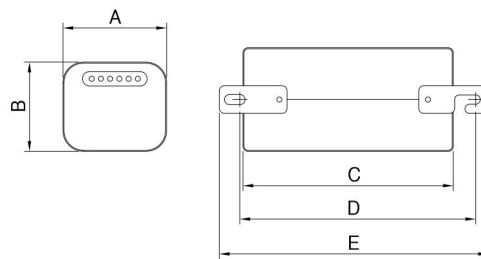

Burning position

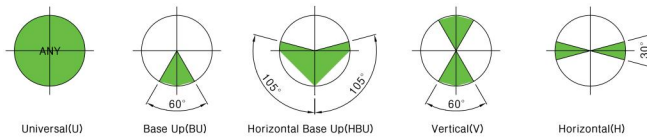

Standard High Pressure Sodium Lamps

Lamp Power (W)	Lamp Holder	Luminous Flux (lm)	CCT (K)	Lamp (V)	Lamp (A)	Avg. Life (Hours)	Diameter (mm)	Length (mm)
100W	E26/E39	3700	5200	130	0.85	8000	72	174
200W	E39	8200	5200	130	1.70	8000	90	230
250W	E39	10500	5200	130	2.15	8000	90	230
300W	E39	14200	5200	135	2.50	8000	90	230
400W	E39	20000	5200	135	3.25	8000	120	275
700W	E39	36000	5200	140	5.45	8000	150	345
1000W	E39	52000	5200	135	8.00	8000	180	382

Ballasts for High Pressure Mercury Lamps

Cat.No	Power (W)	Power supply (V)	Input (A)	Input (W)	2nd Short (A)	Size(mm)				
						A	B	C	D	E
SIE-H100	100W	AC220V/60Hz	0.60	115	1.60	85	75	180	218	256
SIE-H200	200W	AC220V/60Hz	1.10	220	2.80	90	80	180	218	256
SIE-H250	250W	AC220V/60Hz	1.30	272	3.70	90	80	180	218	256
SIE-H300	300W	AC220V/60Hz	1.50	325	4.30	100	85	200	220	260
SIE-H400	400W	AC220V/60Hz	2.20	440	5.70	100	85	200	220	260
SIE-H700	700W	AC220V/60Hz	3.80	765	10.0	150	130	260	280	310
SIE-H1000	1000W	AC220V/60Hz	5.40	1060	13.0	150	130	260	280	310